



City Research Online

City, University of London Institutional Repository

Citation: Sharbirin, A. S., Zaini, M. K. A., Brambilla, G., Rahman, B. M., Grattan, K. T. V. & Ahmad, H. (2021). 3D-printed Tilt Sensor based on an embedded Two-mode Fiber Interferometer. *IEEE Sensors Journal*, 21(6), pp. 7565-7571. doi: 10.1109/JSEN.2021.3050756

This is the accepted version of the paper.

This version of the publication may differ from the final published version.

Permanent repository link: <https://openaccess.city.ac.uk/id/eprint/25509/>


Link to published version: <https://doi.org/10.1109/JSEN.2021.3050756>

Copyright: City Research Online aims to make research outputs of City, University of London available to a wider audience. Copyright and Moral Rights remain with the author(s) and/or copyright holders. URLs from City Research Online may be freely distributed and linked to.

Reuse: Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge. Provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way.

3D-printed Tilt Sensor based on an embedded Two-mode Fiber Interferometer

A. S. Sharbirin, M. K. A. Zaini, G. Brambilla, B.M.A. Rahman, K.T.V. Grattan, M. F. Ismail and H. Ahmad

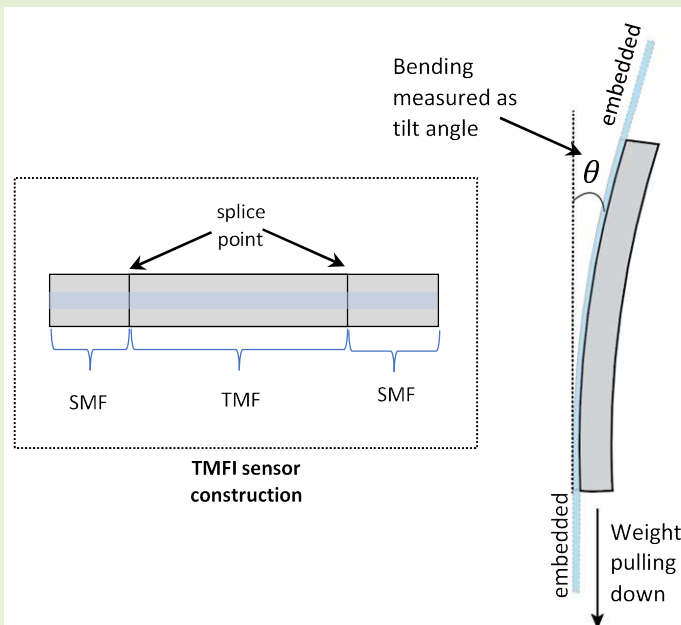

Abstract— A 3D-printed tilt fiber sensor using a two-mode fiber interferometer (TMFI) as the sensing mechanism has been demonstrated. The TMFI was constructed by splicing single-mode fibers (SMF-28s) at both ends of a two-mode fiber (TMF) to generate a comb-like interference spectrum that is sensitive to bending. A 3D-printed cantilever with a weight attached to one end was used to induce bending as the structure was tilted and by embedding the TMFI onto the 3D printed cantilever, different tilt angles can be measured, as a result of the bending of the fiber. The TMFI exhibited a linear response towards the tilt angles, θ , with a responsivity of 1×10^{-2} nm/deg at negative θ (0 to -90°) and 5×10^{-3} nm/deg at positive θ (0 to 90°), respectively. The sensor was able to detect small angle changes in increments as small as 1° and it performs better than embedded FBG sensors. The tilt sensor proposed has a small form factor and simple design, as well as being cost-effective and light-weight, thus showing significant potential for a variety of civil engineering applications.

Index Terms—Fused deposition modelling, tilt sensor, two-mode fiber

I. INTRODUCTION

Fused deposition modelling (FDM), which utilizes the melt extrusion method to deposit thermal plastic filaments in a pre-programmed pattern, has shown significant potential for the fabrication of various structures, in comparison to conventional machining, particularly with advantages in time, cost, and materials being seen. Currently, the FDM method is utilized in 3D-printing machines to assure fast prototyping, better customization, and high precision at a comparatively low cost [1-3], making the 3D printing process a promising alternative for the fabrication of various prototype components, and allowing rapid design iterations.

In the field of optoelectronics, 3D-printing has significant

potential for the fabrication of high performance sensing elements by encapsulating the optical sensor into 3D printed structures [4-6]. Schmitz et. al [7] have successfully demonstrated this in a low cost novel 3D-printed tilt and motion smart sensor, by embedding liquids inside the printed structure. As such, a similar method can be used to embed the optical element inside the printed material during the 3D-printing process [4, 8, 9]. In traditional methods, fiber sensors are usually directly bonded onto the surface of a structure, by using glue or epoxy resin. This, however, may not be suitable for applications where it would be exposed to severe conditions such as high temperature and humidity. [10-12]. Therefore, by embedding the fiber into a 3D structure, more secure and compact designs allowing better fiber optic sensors can be realized [4].

The applications focus of this work is in the development of simple, easy to fabricate and use tilt sensors, which are devices that can measure movements in terms of the angle of tilt and are essential elements of civil engineering projects for a variety of applications such as measuring the angle of drilling in boreholes, monitoring ground or wall movement and tracking landslide movement [11, 13, 14]. Commercial tilt sensors rely on changes in electronic properties, such as resistivity [15], capacitance [16], and induction [17-19]. While adequate for many applications, these electronic sensors

A. S. Sharbirin, M.K.A. Zaini and H. Ahmad (corresponding author) are with the Photonics Research Centre University of Malaya, 50603 Kuala Lumpur, Malaysia and the Physics Dept., Faculty of Science, University of Malaya, 50603 Kuala Lumpur, Malaysia (e-mail: harith@um.edu.my)

G. Brambilla is with the Optoelectronics Research Centre, University of Southampton, United Kingdom.

BMA Rahman and KTV Grattan are with the School of Mathematics, Computer Science and Engineering, Department of Electrical and Electronic Engineering, City, University of London, United Kingdom.

are not particularly well suited for use in harsh environments, in particular for applications that would see them being exposed to electromagnetic interference or other hazardous conditions, such as excessive moisture and dampness which can cause short circuiting or where there are hazardous or corrosive materials present. Therefore, optical methods, specifically those based on fiber optics, are of significant interest, as they are intrinsically safe as no currents flow at the sensor head. They are also light weight and can readily be networked. To date, most fiber optic tilt sensors involve the detection of strain by placing the fiber on a pendulum [20-22], while by contrast Bajić et. al [23] demonstrated a simple and low cost tilt sensor based on the refraction of light. However, these designs are relatively bulky and thus may not be suitable for real-world, in-the-field applications.

In this work, a 3D-printed tilt fiber sensor using a Two-Mode Fiber Interferometer (TMFI) as the sensing mechanism is proposed and its operational efficacy demonstrated. By embedding the TMFI into the 3D-printed structure, different tilt angles can be measured as a result of monitoring the bending of the fiber. The tilt sensor proposed is small and simple to design, low hysteresis, easy to fabricate, light-weight and cost-effective to use.

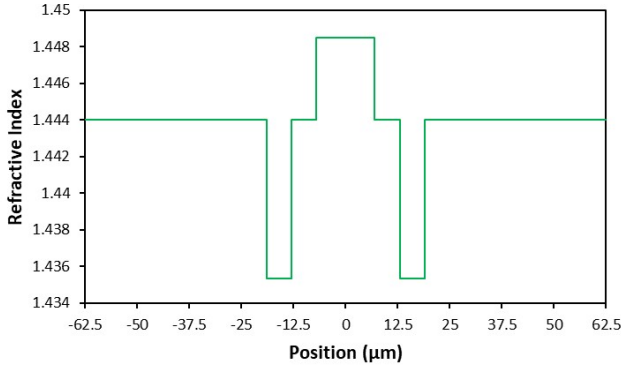


Fig. 1. Refractive index profile of the Two-Mode Step-Index Fiber (TMF) as a function of position

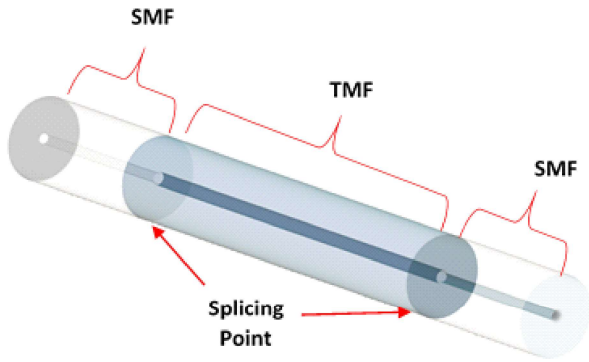


Fig. 2. Structure of the Two-Mode Fiber Interferometer (TMFI) showing the Single Mode Fiber (SMF) and Two Mode Fiber (TMF) sections

II. EXPERIMENTAL SETUP

A. TMFI fabrication

The TMFI structure was fabricated by fusion splicing a 2.5 meter long Two-Mode Step-Index Fiber (TMF) between two SMF-28 single-mode fibers (SMF-28s), one at each end of the TMF. The TMF supports the fundamental (LP_{01}) and second-order (LP_{11}) modes that were seen in the interferometer thus created. A schematic of the TMF refractive index profile, at a wavelength of 1550 nm, is given in Fig. 1, while the TMF structure developed, shown in the form of a 3D drawing is illustrated in Fig. 2. The TMF section, (colored blue), is sandwiched between two SMF fibers to provide the input and output to the system. The splicing between each cleaved end of the TMF was done with a FITELE 178A AUTO Multimode fusion function.

In operation, light from the SMF (SMF-28 fiber) enters the TMF section purely as a LP_{01} mode. As it crosses the first SMF-TMF boundary, the LP_{01} mode partly couples to the LP_{11} mode within the TMF section; the two modes interfere and only a fraction of the light is recoupled back into the LP_{01} at the next TMF-SMF interface, creating an interference effect that appears as a comb-like pattern in the optical transmission spectrum, as shown in Fig. 3. The evolution of the transmission spectra can be expressed as the cosine function of the phase difference between the LP_{01} and LP_{11} modes, based on the two-mode interference theory, whereby:

$$I = I_{LP01} + I_{LP11} + 2\sqrt{I_{LP01}I_{LP11}}\cos\phi.$$

Here ϕ is the phase difference between the two guided modes and can be defined as:

$$\phi = \frac{2\pi n_{eff}\Delta L}{\lambda}$$

where $\Delta L = L_{LP01} - L_{LP11}$ is the effective propagation length difference between the two linearly-polarized modes.

As the value of L is disturbed, the phase difference changes and alters the transmission output as a function of the wavelength shift. The value, L , can be manipulated by applying a stress or strain, i.e. by bending or pulling the fiber. In this setup, the fiber bends as the sensor is tilted, inducing strain and thus causing shifts in the transmission peaks. The characterization of the transmission spectrum of the TMF fabricated is shown in Fig. 4. The measurement was done using an in-house built erbium-doped fiber (EDF) light source to provide the signal, while an AQ6370C Optical Spectrum Analyzer (OSA) was used to record the spectra obtained. The transmission spectrum (Fig. 3) shows a clear comb-like pattern, with a free spectral range (FSR) of 1 nm and an extinction ratio (ER) of 6.5 dB.

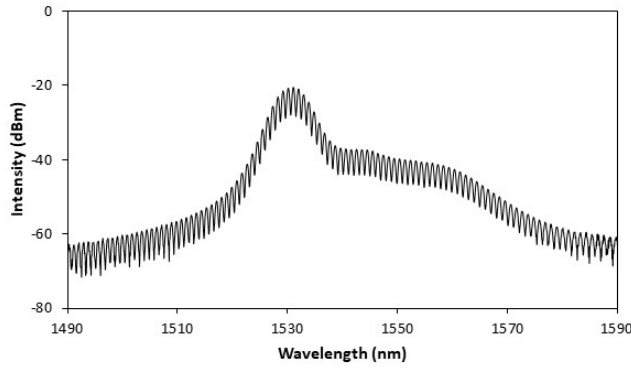


Fig. 3. Transmission Spectrum of the TMFI over the wavelength range 1490 to 1590 nm

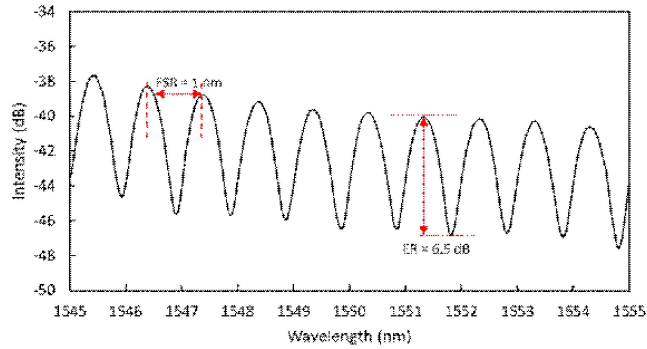


Fig. 4. Characterization of the transmission spectrum of the TMFI over the wavelength range 1545 to 1555 nm

B. Tilt sensor device and experimental setup

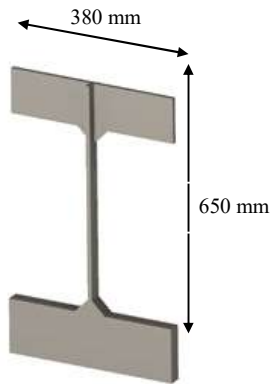


Fig. 5(a). 3D Design of the tilt sensor device design developed using Autodesk Fusion 360 Software

The tilt sensor was fabricated using an Ultimaker 2+ 3D printer and Polylactic Acid (PLA) as the filament material, with a 20% infill density. The sensor was based on a cantilever design, with a small and narrow flat shaft acting as the bending cantilever. The upper part of sensor can be clamped, while the bottom can be used to secure weights and thereby induce bending. The sensor had been designed using the Autodesk Fusion 360 software, with a photograph of the

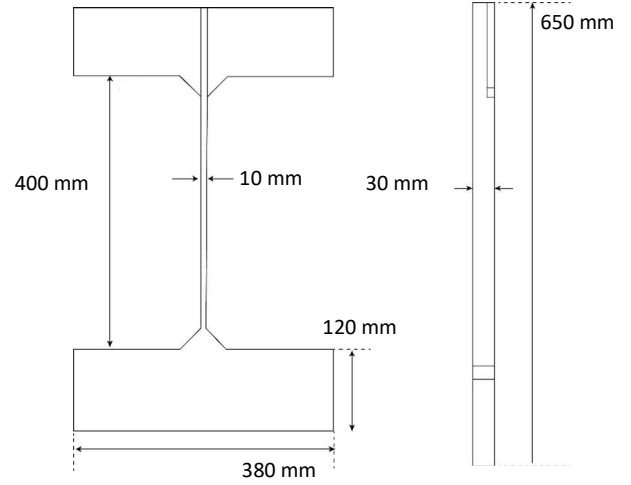


Fig. 5(b). Schematic design of the tilt sensor device showing the dimensions of the device

3D model developed shown in Fig. 5 (a) and the schematic and critical dimensions of the design shown in Fig. 5 (b). The width of the shaft was 10 mm with a total length of 400 mm and a thickness of 30 mm.

In order to integrate the TMFI into the 3D structure, the printing process was paused halfway through. One end of the TMFI was placed on the top part of the design, while the other end was placed on the bottom part, as shown in Fig. 6. A part of the sensor was left exposed and was touching the shaft of the tilt sensor to ensure maximum bending. The experiment to monitor the tilt was carried out by clamping the top part of the sensor on a retort stand and applying a weight of 30 g directly onto the bottom part of the sensor. The tilt was applied manually, by twisting the head of the clamp to cause a shift in the angle. The measurement of the tilt angle, with respect to the negative ($-\theta$) and positive ($+\theta$) angles, is shown in Fig. 7. As the sensor was tilted, the weight pulled the sensor down and caused a bend in the shaft. This bend was detected using the OSA, seen as a shift in the transmission spectrum of the TMFI. The amount of tilt was measured in degrees, using a protractor that has minimum angle measurement of 1° . It is worth noting that as the sensor was tilted at $-\theta$, compression stress occurs on the fiber while tilting at positive angles of θ results instead in a pulling tension. It is expected that the sensitivity of the device would vary, depending on the direction of the tilt.

III. RESULTS AND DISCUSSION

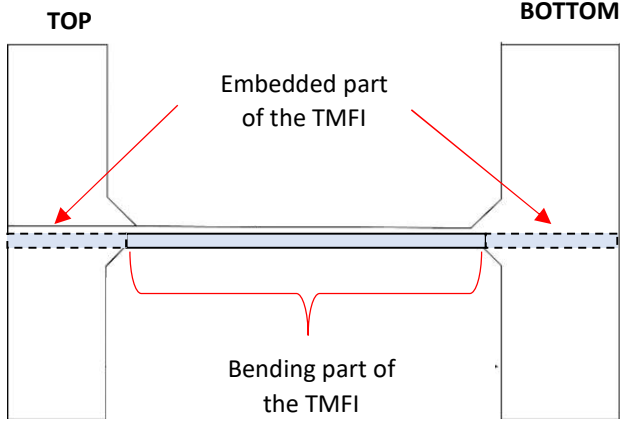


Fig. 6. Illustration of the placement of the fiber onto the 3D printed structure

In an evaluation of the performance of the sensor system, Fig. 8 shows the shift of the transmission spectrum as a function of the change in tilt angle. The spectrum was recorded at 30° intervals, from 0° to -90° . Fig. 8 shows that the transmission peaks 'blueshifts' for increasingly negative values of the angle θ . Fig. 9 illustrates the wavelength shift, shown against the tilt angle, giving a linear response. However, there is a noticeable difference observed between the sensitivity, S , of the TMFI at the negative and positive angles: where $S = 1 \times 10^{-2}$ nm/deg for $-90^\circ < \theta < 0$; while $S = 5 \times 10^{-3}$ nm/deg for $0 < \theta < 90^\circ$. It can be inferred, based on the results obtained, that the TMFI sensor constructed is more sensitive for compression, as opposed to what is seen for tension.

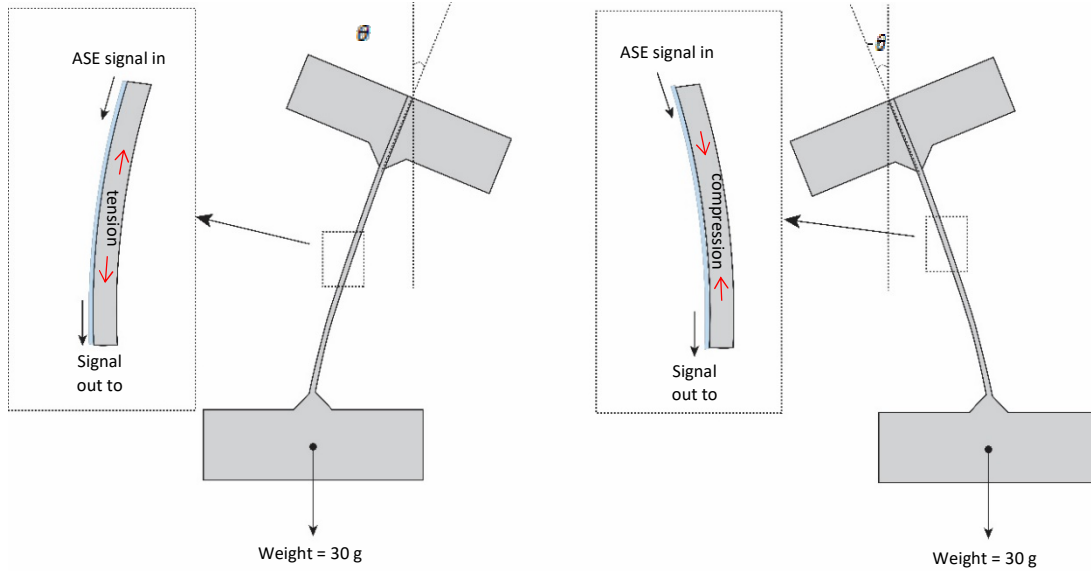


Fig. 7. Illustration of the angle measurement with the tilt sensor

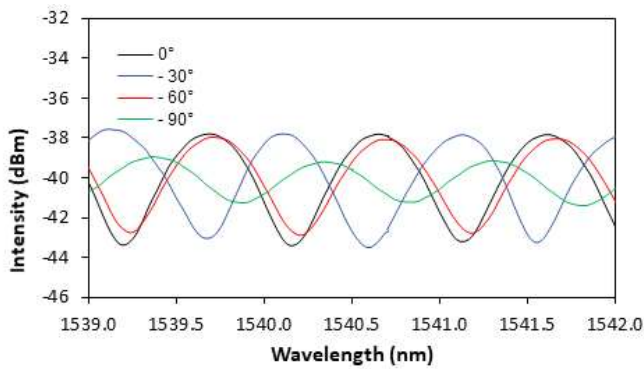


Fig. 8. Transmission spectrum of the TMFI in response to tilt angle for angles 0° , -30° , -60° and -90° over the wavelength range 1539.0 to 1542.0 nm

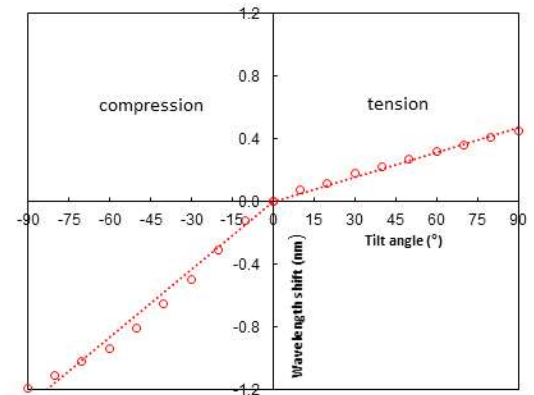


Fig. 9. Wavelength response (shift in nm) of the TMFI in response to tilt angle, illustrating the difference between the compression and the tension situations (over the angles -90° to $+90^\circ$)

The sensing capabilities of the TMFI were further evaluated for the detection of small angles, at 1° increments. With every degree increase in the tilt angle, the transmission spectrum was recorded, with the results obtained being displayed in Fig. 10. The recorded results show that even with using small angles, of 1° increments, the shift in the spectrum is differentiable and measurable by using the OSA. In a way similar to what is seen in Fig. 8, the transmission spectrum ‘blueshifts’ as it is tilted at a negative angle. The relationship between the wavelength shift and the angle tilt is shown in Fig. 11. Based on the results seen at small tilt angles, $S \sim 1 \times 10^{-2}$ nm/deg, which is similar to the data shown in Fig. 9. It should be noted that measurements were taken using a protractor, measuring with an uncertainty of $\sim 0.5^\circ$.

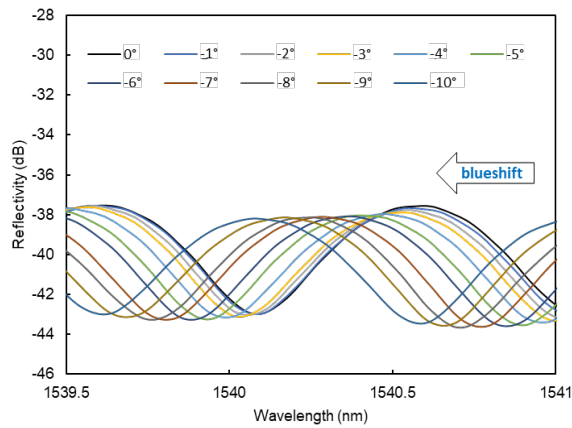


Fig.10. Transmission spectrum of the TMFI in response to 1 degree angle increment in the tilt angle (over the range 0° to -10° , seen over the wavelength range 1539.5 to 1541.0 nm)

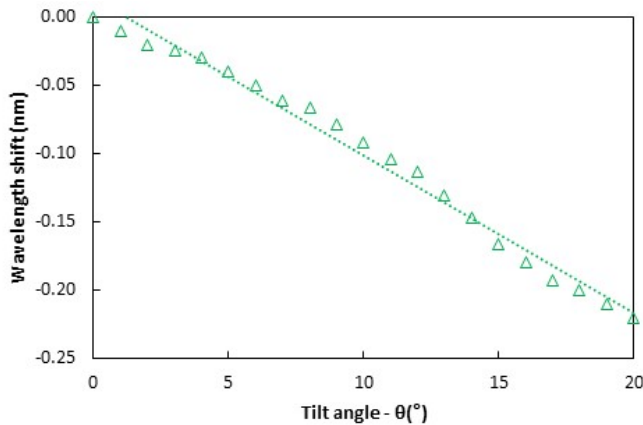


Fig.11. Wavelength response of the TMFI in response to 1 degree angle increment, over the tilt angle 0° to -20°

A similar experiment was carried out using an FBG as the basis of the sensing mechanism, in which the FBG was embedded into the structure using the same method. The result of the experiment carried out using the FBG sensor was compared with that from the TMFI, as shown in Fig. 12. In

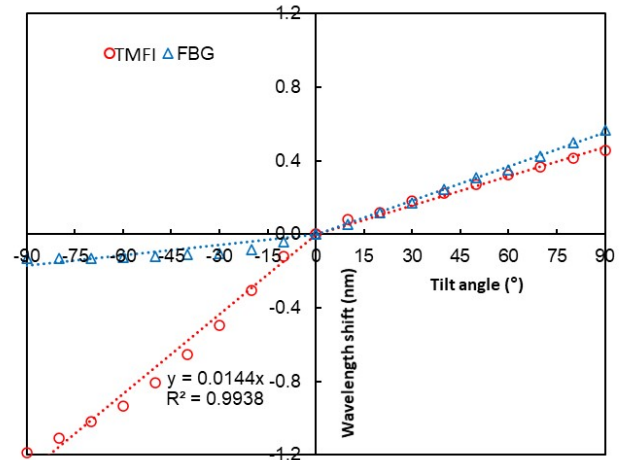


Fig.12. Comparison of the TMFI and the FBG sensor

the positive angle direction, the results show that the use of the FBG gave results which were only slightly better than those seen with the TMFI, with $S \sim 6 \times 10^{-3}$ nm/deg. On the other hand, for negative angles, the FBG—based approach performs poorly, at $S \sim 2 \times 10^{-3}$ nm/deg. This was to be expected as the FBG can react differently, based on whether it sees the tension or compression modes [24]. These results confirm the very satisfactory TMFI performance, by comparison to that from the FBG.

Furthermore, the hysteresis profile of the TMFI was investigated for forward and backward tilt angle measurement at positive angles. Based on the results shown in Fig. 13, the hysteresis of the sensor was determined to be 0.66%. This slight hysteresis could be attributed to the lack of precision resulting from the manual adjustment of the tilt angle

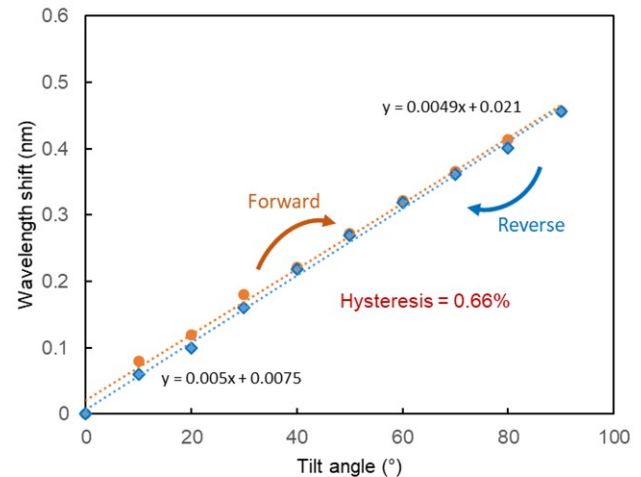


Fig.13. Hysteresis characteristic of the TMFI sensor

The influence of temperature on the performance of the TMFI performance was examined by immersing the sensor at a tilt angle of 0° in a water bath, with the temperature varied from 21°C to 50°C . The relationship between the temperature change and the wavelength shift is shown in Fig. 14, and from the obtained graph the temperature sensitivity of the sensor was determined to be $2.6 \times 10^{-3} \text{ nm}/^\circ\text{C}$. This indicates that the surrounding temperature has only a minimal influence on sensor reading.

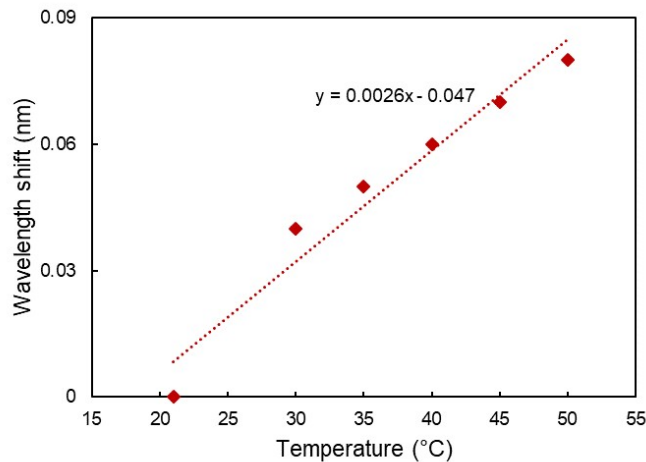


Fig.14. Wavelength response (shift in nm) of the TMFI in response to temperature

IV. CONCLUSION

An inexpensive and easy to produce, 3D-printed tilt fiber sensor that used a TMFI as the sensing mechanism has been designed, fabricated and its performance successfully demonstrated. The TMFI was constructed by splicing a sample of TMF to two SMFs (type SMF-28) to generate a comb-like spectrum, that was sensitive to bending. By embedding the TMFI thus created into the 3D printed structure, different tilt angles could be measured as a result of the bending of the fiber. The TMFI response, at negative angles ($-90^\circ < \theta < 0^\circ$) was $S = 1 \times 10^{-2} \text{ nm/deg}$ which was better than that ($S \sim 5 \times 10^{-3} \text{ nm/deg}$) observed at positive angles ($0^\circ < \theta < 90^\circ$). The research carried out showed that the sensor was also capable of measuring small angle increments, of 1 degree, and it performed well when compared to the results obtained from an embedded FBG sensor. This new tilt sensor has shown that it could have significant potential for a wide range of civil engineering applications. Further improvements can also be made by replacing the PLA material with high durability, high weather resistance and high heat resistance materials for long-term strain measurement.

ACKNOWLEDGMENTS

Funding for this research was from the University of Malaya [Grant number: IF022-2020 (NEWTON), RU002-2020, RU011-2019 and TOP100PRC].

REFERENCES

- [1] T. M. Llewellyn-Jones, B. W. Drinkwater, and R. S. Trask, "3D printed components with ultrasonically arranged microscale structure," *Smart Mater. Struct.*, vol. 25, no. 2, p. 02LT01, 2016.
- [2] S. B. Kesner and R. D. Howe, "Design principles for rapid prototyping forces sensors using 3-D printing," *IEEE/ASME Transactions on mechatronics*, vol. 16, no. 5, pp. 866-870, 2011.
- [3] A. Kantaros and D. Karalekas, "Fiber Bragg grating based investigation of residual strains in ABS parts fabricated by fused deposition modeling process," *Materials & Design*, vol. 50, pp. 44-50, 2013.
- [4] C. Hong, Y. Zhang, Z. Lu, and Z. Yin, "A FBG Tilt Sensor Fabricated Using 3D Printing Technique for Monitoring Ground Movement," *IEEE Sens. J.*, vol. 19, no. 15, pp. 6392-6399, 2019, doi: 10.1109/JSEN.2019.2908873.
- [5] L. Sabantina, F. Kinzel, A. Ehrmann, and K. Finsterbusch, "Combining 3D printed forms with textile structures-mechanical and geometrical properties of multi-material systems," in *IOP Conference Series: Materials Science and Engineering*, 2015, vol. 87, no. 1: IOP Publishing Beijing, p. 012005.
- [6] S. Leigh, C. Purssell, D. Billson, and D. Hutchins, "Using a magnetite/thermoplastic composite in 3D printing of direct replacements for commercially available flow sensors," *Smart Mater. Struct.*, vol. 23, no. 9, p. 095039, 2014.
- [7] M. Schmitz, A. Leister, N. Dezfali, J. Riemann, F. Müller, and M. Mühlhäuser, "Liquido: Embedding Liquids into 3D Printed Objects to Sense Tilting and Motion," in *Proceedings of the 2016 CHI Conference Extended Abstracts on Human Factors in Computing Systems*, 2016, pp. 2688-2696.
- [8] P. C. Liacouras, G. T. Grant, K. Choudhry, G. F. Strouse, and Z. Ahmed, "Fiber Bragg gratings embedded in 3D-printed scaffolds," *NCSLI Measure*, vol. 10, no. 2, pp. 50-52, 2015.
- [9] K. Willis, E. Brockmeyer, S. Hudson, and I. Poupyrev, "Printed optics: 3D printing of embedded optical elements for interactive devices," in *Proceedings of the 25th annual ACM symposium on User interface software and technology*, 2012, pp. 589-598.
- [10] H.-F. Pei, J.-H. Yin, and W. Jin, "Development of novel optical fiber sensors for measuring tilts and displacements of geotechnical structures," *Meas. Sci. Technol.*, vol. 24, no. 9, p. 095202, 2013.
- [11] H. Pei, J. Yin, H. Zhu, and C. Hong, "Development and application of an optical fiber sensor based in-place inclinometer for geotechnical monitoring," in *Geo-Frontiers 2011: Advances in Geotechnical Engineering*, 2011, pp. 1725-1731.
- [12] Y.-T. Ho, A.-B. Huang, J. Ma, and B. Zhang, "Ground movement monitoring using an optic fiber Bragg grating sensed system," in *17th International*

Conference on Optical Fibre Sensors, 2005, vol. 5855: International Society for Optics and Photonics, pp. 1020-1023.

- [13] M. Maheshwari, Y. Yang, D. Upadrashta, and T. Chaturvedi, "A rotation independent in-place inclinometer/tilt sensor based on fiber Bragg grating," *IEEE Trans. Instrum. Meas.*, vol. 68, no. 8, pp. 2943-2953, 2018.
- [14] T. Uchimura, I. Towhata, L. Wang, and J. Qiao, "Miniature ground inclinometer for slope monitoring," in *Proc. of The 14th Asian Regional Conference on Soil Mechanics and Geotechnical Engineering*, 2011.
- [15] C. H. Lin and S. M. Kuo, "Micro-impedance inclinometer with wide-angle measuring capability and no damping effect," *Sensors and Actuators A: Physical*, vol. 143, no. 1, pp. 113-119, 2008.
- [16] D. Benz, T. Botzelmann, H. Kück, and D. Warkentin, "On low cost inclination sensors made from selectively metallized polymer," *Sensors and Actuators A: Physical*, vol. 123, pp. 18-22, 2005.
- [17] L. Rovati and S. Cattini, "Contactless two-axis inclination measurement system using planar flux-gate sensor," *IEEE Trans. Instrum. Meas.*, vol. 59, no. 5, pp. 1284-1293, 2010.
- [18] B. Ando, A. Ascia, and S. Baglio, "A ferrofluidic inclinometer in the resonant configuration," *IEEE Trans. Instrum. Meas.*, vol. 59, no. 3, pp. 558-564, 2009.
- [19] B. Ando, A. Ascia, S. Baglio, and N. Savalli, "A novel ferrofluidic inclinometer," *IEEE Trans. Instrum. Meas.*, vol. 56, no. 4, pp. 1114-1123, 2007.
- [20] H. Au, S. K. Khijwania, H. Fu, W. Chung, and H. Tam, "Temperature-insensitive fiber Bragg grating based tilt sensor with large dynamic range," *J. Lightwave Technol.*, vol. 29, no. 11, pp. 1714-1720, 2011.
- [21] H.-J. Chen, L. Wang, and W. Liu, "Temperature-insensitive fiber Bragg grating tilt sensor," *App Opt.*, vol. 47, no. 4, pp. 556-560, 2008.
- [22] X. Dong, C. Zhan, K. Hu, P. Shum, and C. C. Chan, "Temperature-insensitive tilt sensor with strain-chirped fiber Bragg gratings," *IPTL*, vol. 17, no. 11, pp. 2394-2396, 2005.
- [23] J. S. Bajić, D. Z. Stupar, L. M. Manojlović, M. P. Slankamenac, and M. B. Živanov, "A simple, low-cost, high-sensitivity fiber-optic tilt sensor," *Sensors and Actuators A: Physical*, vol. 185, pp. 33-38, 2012.
- [24] Y. M. Salih *et al.*, "The Impact of Deflection on the Sensing Response of Fiber Bragg Gratings Bonded to Graphene and PMMA Substrates," *Current Optics and Photonics*, vol. 4, no. 2, pp. 95-102, 2020.



A. S. Sharbirin received his B.Sc (Hons) in Pure Physics from Universiti Teknologi Malaysia (UTM). Currently, he is pursuing his PhD in the field of Photonics at Photonics Research Centre, University of Malaya. His research focuses on fiber lasers particularly in the 2-micron wavelength region and the fabrication of microstructures in fiber optics.



M. K. A. Zaini received the Bachelor degree from the Department of Physics, Faculty of Science, University Putra Malaysia, Malaysia, in 2015, and currently a postgraduate candidate at Photonics Research Centre, University of Malaya. His current research interest include fiber Bragg grating sensors, and Spatial Division Multiplexing.



G. Brambilla Gilberto Brambilla is a professor at the Optoelectronics Research Centre and, since 2016, co-Director and General Manager of the Future Photonics Hub. He has been Director of the Centre for Innovative Manufacturing in Photonics until 2015. He obtained his MSc (Engineering) with honours from Politecnico di Milano (Italy) in 1996 and his PhD degree in Optoelectronics from the University of Southampton in 2002. In 2007 he was awarded the Royal Society Research Fellowship, which was then extended in 2012. His research interests include optical fibre sensors; optical fibre structuring using fs lasers; specialty and polymer fibres; new fibre fabrication technologies; UV fibre lasers; devices based on optical fibre nanowires, fibre tapers and couplers; rare earth doped scintillating fibres and fibres for nuclear sensing.



B. M. A. Rahman Professor B. M. Azizur Rahman received BSc Eng and MSc Eng degrees in Electrical Engineering with distinctions from Bangladesh University of Engineering and Technology (BUET), Dhaka, Bangladesh, in 1976 and 1979, respectively. He received his PhD degree in Electronic Engineering from University College, London in 1982. From 1976 to 1979, he was a Lecturer at the Electrical Engineering Department, BUET. In 1988, he joined the Electrical, Electronic and Information Engineering Department of City University, London, as a Lecturer, where he is now a Professor. At City University, he leads the research group on Photonics Modelling, specialised in the development and use of the rigorous and full-vectorial numerical approaches, frequency domain modal solution approach, the beam propagation method, and time-domain approach, primarily based on the numerically efficient finite element method.



K. T. V. Grattan Professor Grattan graduated in Physics from Queen's University Belfast with a BSc (First Class Honours) in 1974, followed by a PhD in Laser Physics. His doctoral research involved the use of laser-probe techniques for measurements on potential new laser systems. He obtained the degree of Doctor of Science (DSc) from City University in 1992 for his sensor work. His research interests have expanded to include the development and use

of fibre optic and optical systems in the measurement of a range of physical and chemical parameters.



Mohammad F. Ismail Mohammad Faizal Ismail obtained his Bachelor of Engineering (Telecommunication) from the Faculty of Engineering, University of Malaya in 1999 and Master of Engineering (Science) from the Faculty of Engineering, University of Malaya in 2004. His research focuses on pulsed, multiwavelength fibre lasers and waveguide.



H. Ahmad received the Ph.D. degree in laser technology from the University of Wales, Swansea, U.K., in 1983. He is currently a Professor with the Department of Physics and director of the Photonics Research Centre, University of Malaya, Kuala Lumpur, Malaysia, where he has actively pursued research activities in the field of photonics since 1983. He is the author of more than 400 professional papers in international journals and conference

proceedings. His research interests are in lasers, fiber-based devices for telecommunications, and fiber-based sensor devices. Dr. Ahmad is a Fellow of the Academy of Sciences, Malaysia.